## **MOONLIGHT TECHNOLOGY LIMITED**

## LED Street Light Housing MLT-SLH-EL-II



#### **Brief Introduction**

This LED street light housing fixture MLT-SLH-EL-II is the large size of SMD LED street light housing fixture from Moonlight LED street light E series. Modern design, precision die-casting molded and superior corrosion resistant coating finish housing with standard twist lock photocell mounting platform, make this housing can be used for variety of LED roadway lighting applications.

#### Feature


- ♦ Durable aluminum alloy die-casting housing for heavy-duty outdoor lighting applications.
- ♦ Casting-integral heat sink with fins increased air flow velocity providing maximum passive thermal management.
- $\diamond$  Easy drainage fins system.
- ♦ Separate LED light engine and driver box for easy maintenance.
- $\diamond$  Tool-less design for replace the LED driver without any tool.
- ♦ Large driver box complies with Meanwelll HVG series drivers.
- $\diamond$  Both cover and bottom of the driver box have the GND bosses for security.
- ♦ Plastic electrostatic spraying to resist corrosion, chipping and fading.

http://www.led-light-housing.com

# **MOONLIGHT TECHNOLOGY LIMITED**

- ♦ Adjustable knuckle slip fitter with stainless steel hardware secures fixture to pole arm.
- ♦ 5mm high light transmittance tempered glass diffuser.
- ♦ Silicon gaskets.
- ♦ Stainless steel bolts and clips for fastening
- $\diamond$  IP65 rated, protect from all dust and harsh weather.
- $\diamond$  Standard Gray finish.
- $\diamond$  Easy to assemble, install and linemen friendly maintain.

### **Mechanical Dimensions**

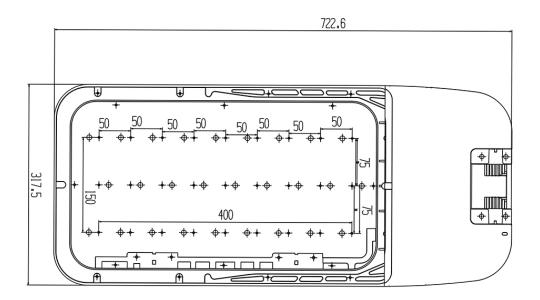



# **MOONLIGHT TECHNOLOGY LIMITED**

### Parameter

Model No.	LED Street Light Housing MLT-SLH-EL-II
Dimension of Housing	72.3cm(L)*31.8cm(W)*6.2cm(H)
Fixture Material	Die-casting Aluminum Alloy
Surface Finish Color	Gray or Customized color
Material of Diffuser	High Transmittance Tempered glass
Effective MCPCB Mounting Size	470mm(L)*250mm(W)
Recommended LED Power	200W to 280W
Driver Box Dimension	250mm(L)*150mm(W)*50mm(H)
Pole Mounting	Accommodates up to $\Phi$ 65mm pipe
Adjustable Slip Fitter	$0^{\circ}$ to +90°
Standard Photocell	N/A
IP Rating	IP65

## Pictures

Front View

Back View





### **Packing Information**

Net Weight	9.58kg/PCS
Gross weight	10.80kg/carton
Quantity	1PCS/ carton
Carton Size	85cm(L)*37.5cm(W)*18cm(H)

## Application

This heavy-duty, modern design and cost-effective LED street light housing fixture is typically used as 200W-280W LED street lighting fixture. LED street lighting is used extensively in urban settings, along small town downtown main streets, in residential neighborhoods, in commercial districts, public squares, in industrial parks, at interstate highway interchanges, bridges, and rural intersections.